



## MODEL 3801A MEMS DC ACCELEROMETER

### SPECIFICATIONS

- Gas Damped, DC Response
- Hermetically Sealed
- mV Output, Silicon MEMS
- 10,000g Over-Range Protection

The Model 3801A is a mV output piezoresistive MEMS accelerometer in a rugged welded hermetic package. The accelerometer incorporates mechanical stops for over-range protection up to greater than 10,000g. The model 3801A is offered in ranges from  $\pm 50g$  to  $\pm 2000g$  and is gas damped to provide a wide frequency response with optimum high frequency attenuation. The accelerometer is temperature compensated to provide a stable output over the operating environment.

For a triaxial package, TE Connectivity also offers the model 3803A accelerometer and for low-g ranges the model 4801A DC accelerometer is offered.

### APPLICATIONS

- Aerospace Testing
- Impact Testing
- Structural Testing
- Test and Instrumentation
- Environmental Testing
- Vehicle Testing

### FEATURES

- $\pm 50g$  to  $\pm 2000g$  Dynamic Range
- 10,000g Shock Protection
- Hermetically Sealed
- Gas Damping
- mV Output, DC Response
- Stud Mounting


**PERFORMANCE SPECIFICATIONS**

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.


Parameters						Notes
<b>DYNAMIC</b>						
Range (g)	±50	±100	±200	±500	±2000	
Sensitivity (mV/g)	1.0-2.2	0.49-1.0	0.49-1.0	0.22-0.48	0.07-0.22	@10Vdc Exc.
Frequency Response (Hz)	0-800	0-1200	0-1300	0-1800	0-4000	±5%
Frequency Response (Hz)	0-1000	0-1500	0-1600	0-2300	0-5000	±1dB
Natural Frequency (Hz)	4000	6000	7000	8000	10000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<1.5% Option
Damping Ratio	0.7	0.7	0.6	0.5	0.15	
Shock Limit (g)	10000	10000	10000	10000	10000	
<b>ELECTRICAL</b>						
Zero Acceleration Output (mV)	±25					Differential
Excitation Voltage (Vdc)	5 to 10					
Input Resistance (kΩ)	4 to 10					
Output Resistance (kΩ)	2.4 to 4.8					
Insulation Resistance (MΩ)	>100					@100Vdc
Residual Noise (µV RMS)	10					Maximum
Ground Isolation	Isolated from Mounting Surface					
<b>ENVIRONMENTAL</b>						
Thermal Zero Shift (%FSO/°C)	±0.04					
Thermal Sensitivity Shift (%/°C)	±0.05					
Operating Temperature (°C)	-55 to +125					
Compensated Temperature (°C)	-20 to +85					
Storage Temperature (°C)	-55 to +125					
Humidity	Hermetically Sealed, IP67					
<b>PHYSICAL</b>						
Case Material	Stainless Steel					
Weight (grams)	20					
Mounting	#10-32 to #10-32 Mounting Stud (included)					
Mounting Torque	18 lb-in (2.0 N-m)					
<b>Calibration supplied:</b>	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit				
<b>Supplied accessories:</b>	AC-D02298	10-32 to 10-32 mounting stud				
<b>Optional accessories:</b>	340A-060	Cable Assembly, #28 AWG, 5ft				
	340A-120	Cable Assembly, #28 AWG, 10ft				
	AC-A04773	Triaxial Mounting Block				
	121	3-Channel Precision Low Noise DC Amplifier				
	140A	Auto-zero Inline Amplifier				

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. TE Connectivity reserves the right to make changes without further notice to any product herein. TE Connectivity makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does TE Connectivity assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. TE Connectivity does not convey any license under its patent rights nor the rights of others.


**DIMENSIONS**

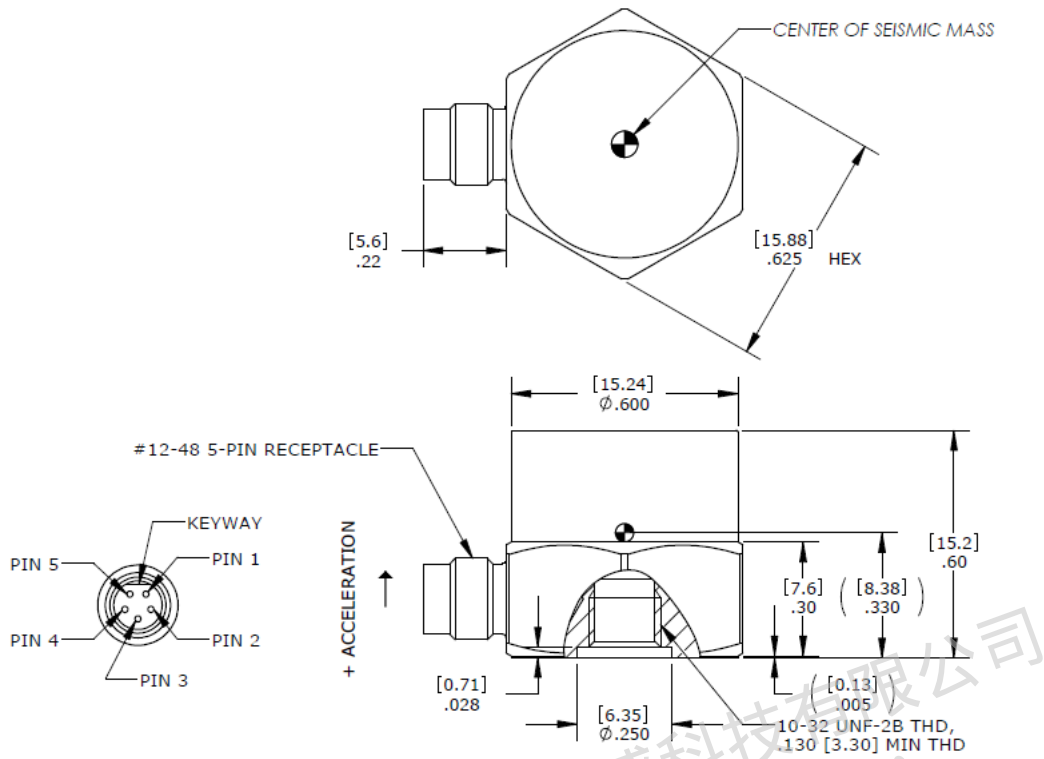

**TRIAxIAL MOUNTING BLOCK (PN AC-A04773)**

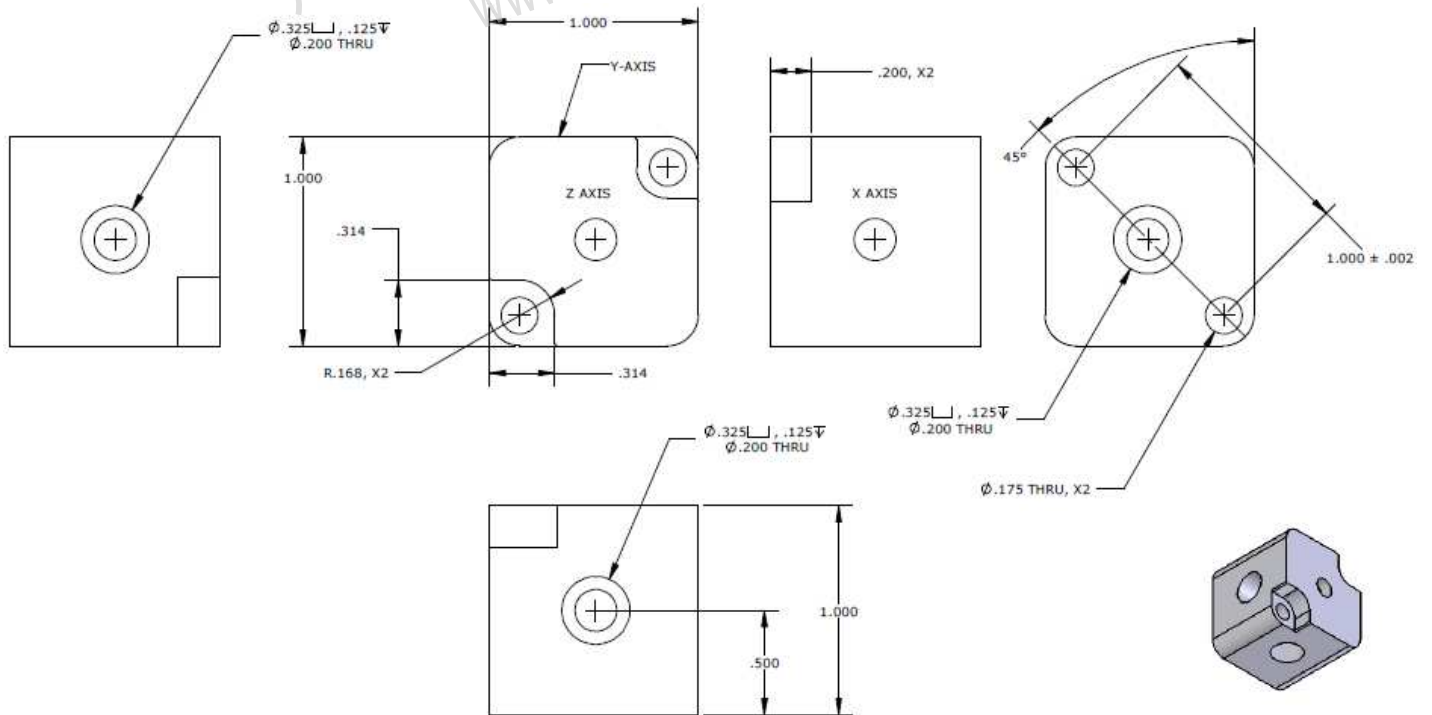

SCHEMATIC

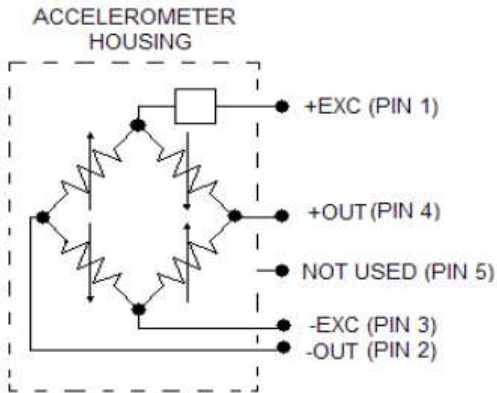

ORDERING INFORMATION

3801A	GGGG	XX
<b>Range</b>		
0050=50g		
0100=100g		
0200=200g		
0500=500g		
1000=1000g		
2000=2000g		
<b>Excitation Voltage Option</b>		
Blank=10Vdc		
01=5Vdc		

Example; 3801A-0100  
Model 3801A, 100g range, no options

广州工控传感科技有限公司

电话: 400-822-6658  
邮箱: gzgk@foxmail.com  
网址: www.gkmems.com  
地址: 广州市天河区珠江西路15号16层